


forsterthermfix®vario
forsterthermfix®varioHI
forsterthermfix®light



$U_f > 0.49 \text{ W/(m}^2\text{K)}$




















EI30-EI90/E30-E90/
EW30-EW60






RC 1-3



FB4 NS

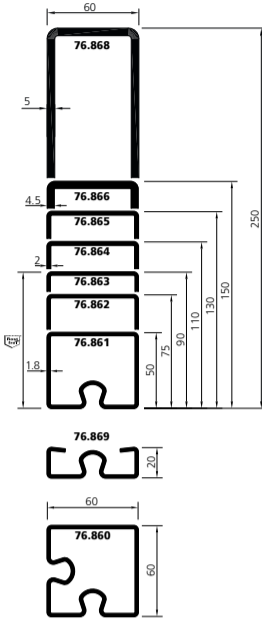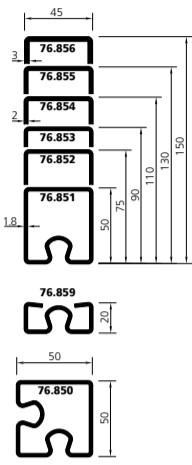




forsterthermfix®vario
forsterthermfix®varioHI

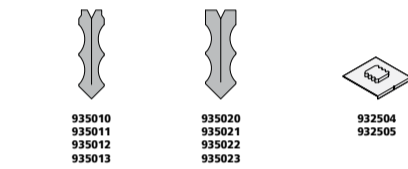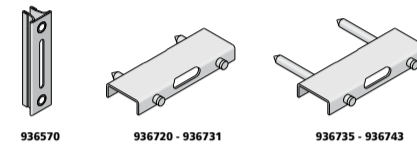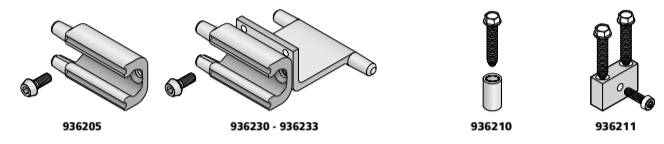

45 mm	blank brut raw	verzinkt zingue galvanised	GV/BC	CrNi*
76.850	•		•	
76.851	•		•	•
76.852	•		•	•
76.853	•		•	•
76.854	•		•	•
76.855	•		•	•
76.856	•		•	•
76.859		•		

60 mm	blank brut raw	verzinkt zingue galvanised	GV/BC*	ZM	CrNi*
76.860	•		•		
76.861	•		•	•	•
76.862	•		•	•	•
76.863	•		•	•	•
76.864	•		•	•	•
76.865	•		•	•	•
76.866	•		•	•	•
76.868	•		•		
76.869		•			

forsterthermfix®light

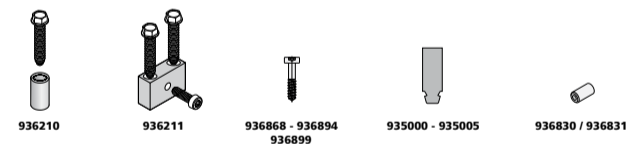

* auf Anfrage sur demande on request